Approx. weight

Material	lb	kg
Carbon steel	1212	550
Stainless steel 304 and 304L	1220	553
Stainless steel 316 and 316L	1235	560

Densities 7.85, 7.9 and 8.0 g/cm3.
Calculated from the dimensions as the standard gives them, with no allowance for tolerance.

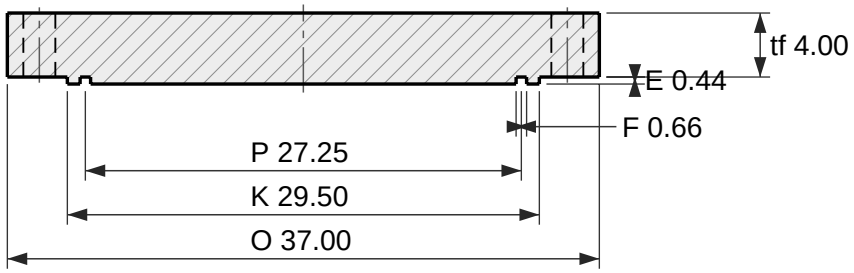

Section

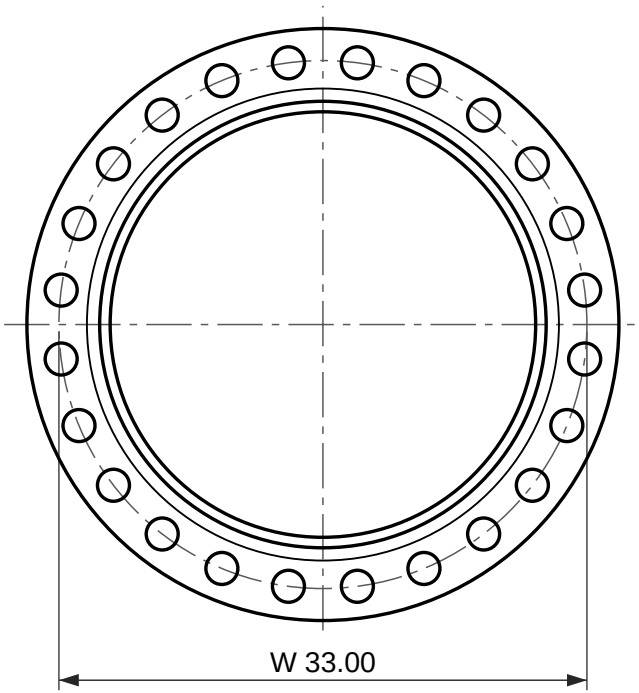

24 holes Ø2.00

Face view

Blind flange, ASME B16.5 Class 600 RJ

NPS 24 (DN 600)

Dimensions per ASME B16.5-2025, inches and millimetres as the standard's own tables give them.
Ring joint facing to ASME B16.5 Table 5, ring and groove number R77. The raised portion stands E above the flange, the same as the depth of the groove, so the bottom of the groove is level with the flange face. Ring joint gasket dimensions are to ASME B16.20 (clause 6.11.1).
tf is the ASME B16.5 dimension, measured without the raised portion; the tf + E row is the same flange measured over the facing.
Reference drawing. The purchase order and ASME B16.5 govern. Check the latest edition.
Generated at rajendradatacenter.us/flanges/ring-type-joint/

Dimension		in	mm
O	Outside diameter	37.00	940
K	Diameter of the raised portion	29.50	749
E	Depth of the groove, and the raised portion	0.44	11.13
P	Pitch diameter of the groove	27.25	692.15
F	Width of the groove	0.66	16.66
r	Radius at the bottom of the groove	0.06	1.5
tf	Thickness (min), without the raised portion	4.00	101.6
tf + E	Thickness over the raised portion	4.44	112.7
W	Bolt circle diameter	33.00	838.2
h	Bolt holes, 24 off	2.00	50.8

24 stud bolts of 1-7/8 in; holes 2.00 in (50.8 mm)

RAJENDRA INDUSTRIAL CORPORATION

rajendradatacenter.us
Drawing RIC-B165-BL600RJ-24
Scale 1:12 on Letter
Units: inches (mm)
Date 2026-11-22
Quote: rajendradatacenter.us/rfq/
sales@rajendradatacenter.com
+91 74338 71355