Approx. weight

Material	lb	kg
Carbon steel	15.5	7.0
Stainless steel 304 and 304L	15.6	7.1
Stainless steel 316 and 316L	15.8	7.2

Densities 7.85, 7.9 and 8.0 g/cm3.
Calculated from the dimensions as the standard gives them, with no allowance for tolerance.

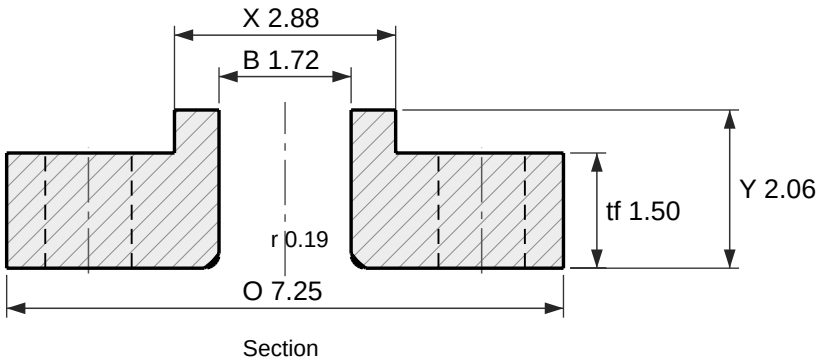

Section

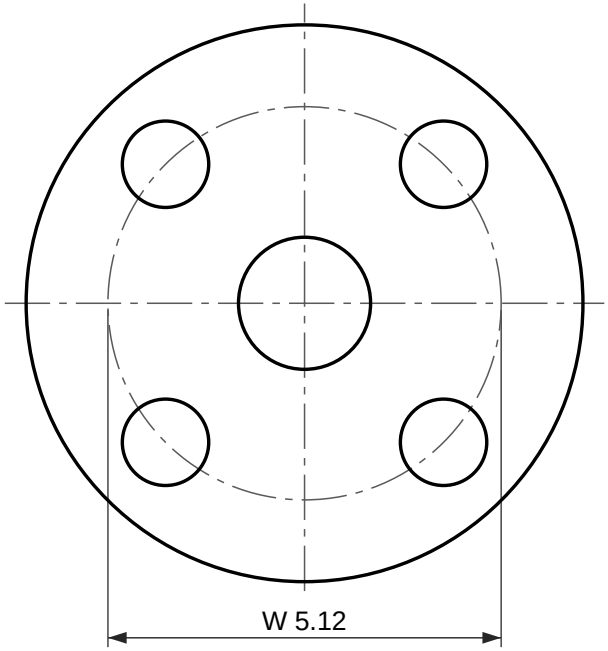

4 holes Ø1.12
Face view

Lap joint flange, ASME B16.5 Class 2500

NPS 1-1/4 (DN 32)

Dimensions per ASME B16.5-2025, inches and millimetres as the standard's own tables give them.
Lap joint flange: no raised face; it seats on the stub end lap.
Reference drawing. The purchase order and ASME B16.5 govern. Check the latest edition.
Generated at rajendradatacenter.us/flanges/high-pressure/

Dimension	in	mm
O Outside diameter	7.25	184
tf Flange thickness	1.50	38.1
Y Length through hub	2.06	52
X Hub diameter at base	2.88	73
B Bore	1.72	43.7
r Corner radius of bore	0.19	5
W Bolt circle diameter	5.12	130
h Bolt holes, 4 off	1.12	28.6

4 stud bolts of 1 in; holes 1.12 in (28.6 mm)

RAJENDRA INDUSTRIAL CORPORATION
rajendradatacenter.us
Drawing RIC-B165-LJ2500-1.25
Scale 1:2.5 on Letter
Units: inches (mm)
Date 2026-11-22
Quote: rajendradatacenter.us/rfq/
sales@rajendradatacenter.com
+91 74338 71355