Approx. weight

Material	lb	kg
Carbon steel	1481	672
Stainless steel 304 and 304L	1490	676
Stainless steel 316 and 316L	1509	685

Densities 7.85, 7.9 and 8.0 g/cm3.
Calculated from the dimensions as the standard gives them, with no allowance for tolerance.

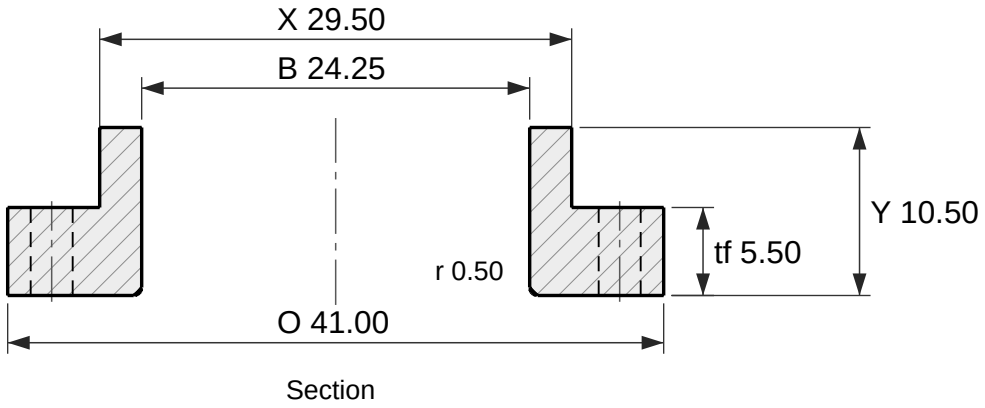

Section

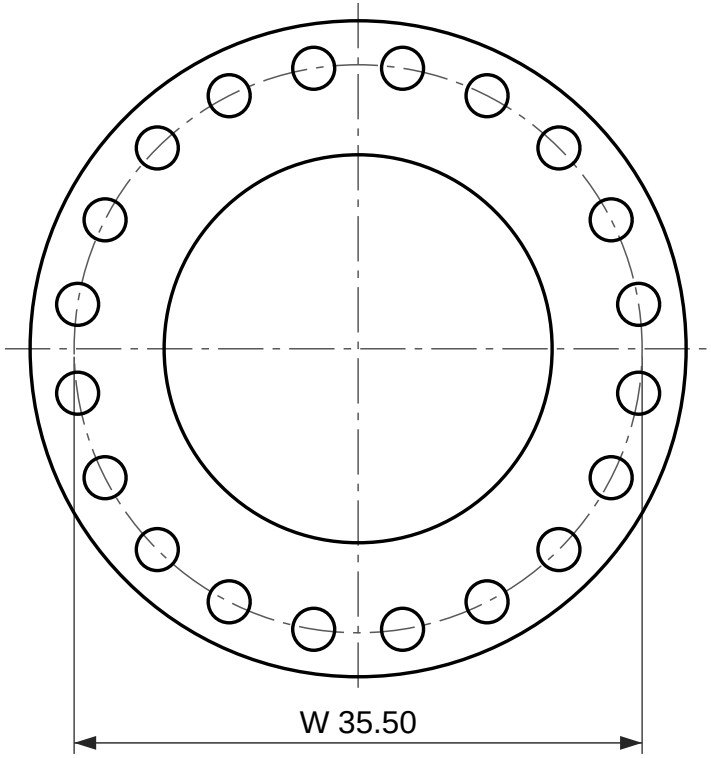

20 holes Ø2.62
Face view

Lap joint flange, ASME B16.5 Class 900

NPS 24 (DN 600)

Dimensions per ASME B16.5-2025, inches and millimetres as the standard's own tables give them.
Lap joint flange: no raised face; it seats on the stub end lap.
Reference drawing. The purchase order and ASME B16.5 govern. Check the latest edition.
Generated at rajendradatacenter.us/flanges/high-pressure/

Dimension	in	mm
O Outside diameter	41.00	1041
tf Flange thickness	5.50	139.7
Y Length through hub	10.50	267
X Hub diameter at base	29.50	749
B Bore	24.25	616
r Corner radius of bore	0.50	13
W Bolt circle diameter	35.50	901.7
h Bolt holes, 20 off	2.62	66.7

20 stud bolts of 2-1/2 in; holes 2.62 in (66.7 mm)

RAJENDRA INDUSTRIAL CORPORATION
rajendradatacenter.us
Drawing RIC-B165-LJ900-24
Scale 1:12 on Letter
Units: inches (mm)
Date 2026-11-22
Quote: rajendradatacenter.us/rfq/
sales@rajendradatacenter.com
+91 74338 71355