

Approx. weight

Material	lb	kg
Carbon steel	11.7	5.3
Stainless steel 304 and 304L	11.7	5.3
Stainless steel 316 and 316L	11.9	5.4

Densities 7.85, 7.9 and 8.0 g/cm3.
Calculated from the dimensions as the standard gives them, with no allowance for tolerance.

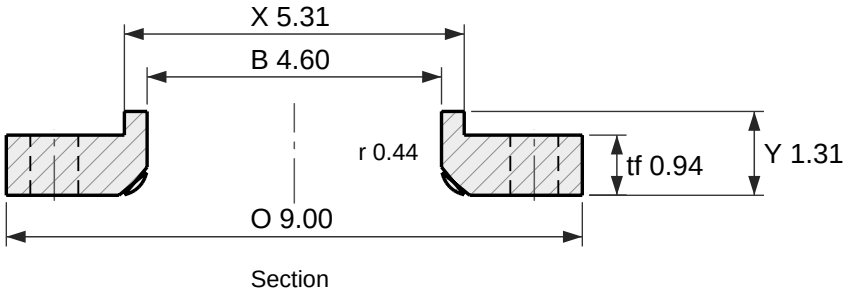

Section

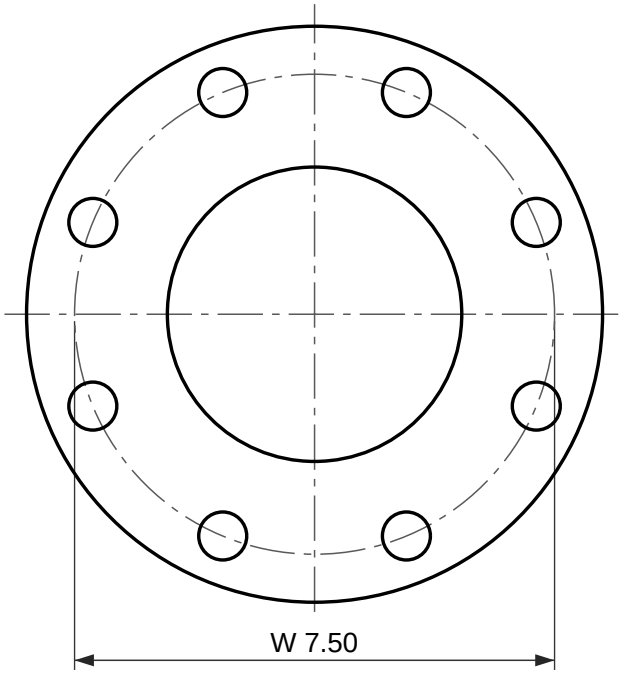

8 holes Ø0.75
Face view

Lap joint flange, ASME B16.5 Class 150

NPS 4 (DN 100)

Dimensions per ASME B16.5-2025, inches and millimetres as the standard's own tables give them.
Lap joint flange: no raised face; it seats on the stub end lap.
Reference drawing. The purchase order and ASME B16.5 govern. Check the latest edition.
Generated at rajendradatacenter.us/flanges/lap-joint/

Dimension	in	mm
O Outside diameter	9.00	229
tf Flange thickness	0.94	23.9
Y Length through hub	1.31	33
X Hub diameter at base	5.31	135
B Bore	4.60	116.8
r Corner radius of bore	0.44	11
W Bolt circle diameter	7.50	190.5
h Bolt holes, 8 off	0.75	19.1

8 stud bolts of 5/8 in; holes 0.75 in (19.1 mm)

RAJENDRA INDUSTRIAL CORPORATION
rajendradatacenter.us
Drawing RIC-B165-LJ150-4
Scale 1:3 on Letter
Units: inches (mm)
Date 2026-11-22
Quote: rajendradatacenter.us/rfq/
sales@rajendradatacenter.com
+91 74338 71355